


Mixed Layout D Connector Accessories

Sealing Plugs

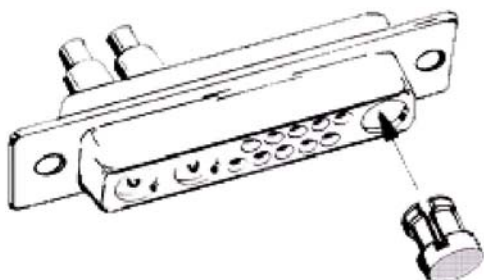


Colour	Part No.
Red	DAC 287
Black	DAC 240

EMC Shielded Plastic Caps



Plug	Part Number	Socket	Part Number
9 way	DAC 143 NP	9 way	DAC 190 NP
15 way	DAC 140 NP	15 way	DAC 150 NP
25 way	DAC 291 NP	25 way	DAC 110 NP
37 way	DAC 174 NP	37 way	DAC 175 NP
50 way	DAC 331 NP	50 way	DAC 332 NP

'D' Cut Out Cover Plates



Description	Part Number
9 way	DAC 333
15 way	DAC 334
25 way	DAC 335
37 way	DAC 336
50 way	DAC 337

RF Gaskets

**Specification:**

Available for shell sizes: 1,2,3,4,5  
 Shielding effectiveness: (30 MHz - 1GHz),  
 MIL 285 > 60dB  
 Operating Temperature: -40°C to 85°C  
 Surface resistivity: 0.02 ohm/mm  
 Abrasion resistance (wear cycle): 10<sup>5</sup>



**Features:**

- Available for all standard shell sizes
- Suitable for use with normal D-Sub connectors (standard and high density)
- Facilitates EMI/EMC design
- Air and watertight, preventing corrosion at the contact points
- Silver metallised nylon fabric and abrasion proof conductive coating
- Large number of defined contact support points per surface for use in the highest frequency areas
- Very resistant to ageing
- UL94 V-O and UL94 HB listed
- Rear mounting i.e. inside the shell